




7/26E - 7/31E Portable Air Compressors



Model	7/26E		7/31E	
COMPRESSOR				
Free Air Delivery - m ³ /min (cfm)	2.5 (90)		3.0 (105)	
Rated Operating Pressure - bar (psi)	7 (100)		7 (100)	
Maximum allowable pressure - bar (psi)	8.6 (125)		8.6 (125)	
Safety valve setting - bar (psi)	10 (145)		10 (145)	
ENGINE				
Make	Ingersoll Rand		Ingersoll Rand	
Model	3IRH2NS		3IRH8N	
No of cylinders	3		3	
Full load speed - rpm	2800		2800	
Power - kW (hp)	21.2 (28.5)		26.0 (34.8)	
Electrical - volts	12		12	
Cooling	water		water	
Fuel tank capacity - liters	50		50	
Air outlets BSPT (British Standard Pipe Thread)	2 x 3/4"		2 x 3/4"	
SOUND LEVEL DATA				
Fully compliant to outdoor noise directive 2000/14/EC (2006)	LWa	98	98	
TYRES				
Tyre size	155R13		155R13	
Number of wheels	2		2	
	7/26E			
	7/31E			
	Without brakes		With brakes	
TOWBAR	Fixed	Adjustable	Fixed	Adjustable
Length - mm (A)	2707	2885/ 3065	2923	3229/ 3357
Width - mm (B)	1390	1390	1390	1390
Height - mm (C)	1235	1235	1235	1235
Weight (net)* - kg	540	560	575	590
	Without brakes		With brakes	
TOWBAR	Fixed	Adjustable	Fixed	Adjustable
Length - mm (A)	2707	2885/ 3065	2923	3229/ 3357
Width - mm (B)	1390	1390	1390	1390
Height - mm (C)	1235	1235	1235	1235
Weight (net)* - kg	560	580	595	610
Box skid mounted				
	7/26E		7/31E	
Length - mm (D)	1610		1610	
Width - mm (E)	940		940	
Height - mm (I)	1070		1070	
Weight (net)* - kg	495		515	
Box				
	7/26E		7/31E	
Length - mm (D)	1610		1610	
Width - mm (E)	940		940	
Height - mm (H)	870		870	
Weight (net)* - kg	465		485	

*full fuel add 40kg
 generator option add 53kg
 full option add 60kg

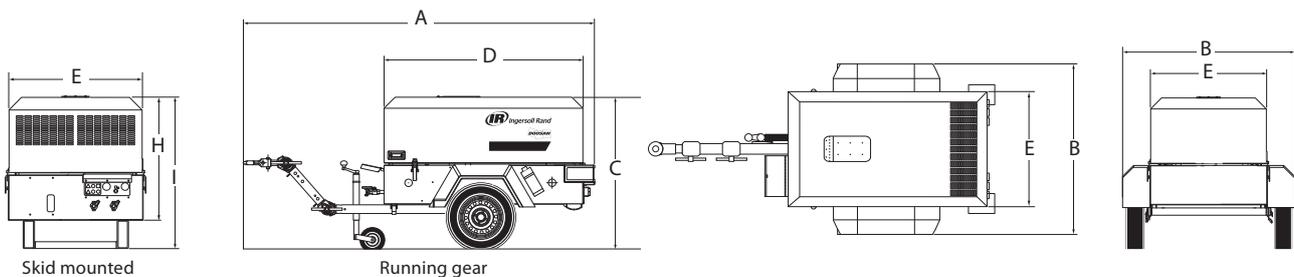

www.doosanportablepower.com



Product improvement is a continuous goal at Doosan Infracore Portable Power. Specifications and design are subject to change without notice or obligation. All dimensions in mm.

