

# Genie® Superlift Advantage® SLA™-5, SLA-10, SLA-15, SLA-20 & SLA-25

## Specifications

| Models                                                     | SLA-5        |        | SLA-10       |        | SLA-15       |        | SLA-20       |        | SLA-25      |        |
|------------------------------------------------------------|--------------|--------|--------------|--------|--------------|--------|--------------|--------|-------------|--------|
| Measurements                                               | US           | METRIC | US           | METRIC | US           | METRIC | US           | METRIC | US          | METRIC |
| Working height - standard forks (forks down)               | 4 ft 10.5 in | 1.49 m | 9 ft 9 in    | 2.97 m | 14 ft 7.5 in | 4.46 m | 19 ft 6 in   | 5.94 m | 24 ft 4 in  | 7.42 m |
| Working height - standard forks (forks up)                 | 6 ft 7 in    | 2.0 m  | 11 ft 5.5 in | 3.49 m | 16 ft 4 in   | 4.98 m | 21 ft 2.5 in | 6.46 m | 26 ft .5 in | 7.94 m |
| Working height - adjustable forks (forks down)             | 4 ft 10.5 in | 1.49 m | 9 ft 9 in    | 2.97 m | 14 ft 7.5 in | 4.46 m | 19 ft 6 in   | 5.94 m | 24 ft 4 in  | 7.42 m |
| Working height - adjustable forks (forks up)               | 6 ft 7 in    | 2.0 m  | 11 ft 5.5 in | 3.49 m | 16 ft 4 in   | 4.98 m | 21 ft 2.5 in | 6.46 m | 26 ft .5 in | 7.94 m |
| Working height - flat forks                                | 4 ft 10.5 in | 1.49 m | 9 ft 9 in    | 2.97 m | 14 ft 7.5 in | 4.46 m | -            | -      | -           | -      |
| Working height - boom <sup>(3)</sup>                       | 5 ft 10.5 in | 1.79 m | 10 ft 9 in   | 3.28 m | 15 ft 7.5 in | 4.76 m | 20 ft 6 in   | 6.25 m | 24 ft 4 in  | 7.42 m |
| Working height - load platform <sup>(2)</sup> - forks down | 4 ft 10.5 in | 1.49 m | 9 ft 9 in    | 2.97 m | 14 ft 7.5 in | 4.46 m | 19 ft 6 in   | 5.94 m | 24 ft 4 in  | 7.42 m |
| Working height - load platform <sup>(2)</sup> - forks up   | 6 ft 7 in    | 2.0 m  | 11 ft 5.5 in | 3.49 m | 16 ft 4 in   | 4.98 m | 21 ft 2.5 in | 6.46 m | 26 ft .5 in | 7.94 m |
| A Height - stowed                                          | 6 ft 6.5 in  | 1.99 m | 6 ft 6.5 in  | 1.99 m | 6 ft 6.5 in  | 1.99 m | 6 ft 6.5 in  | 1.99 m | 6 ft 6.5 in | 1.99 m |
| B Standard base Length - stowed                            | 2 ft 5 in    | 0.74 m | 2 ft 5 in    | 0.74 m | 2 ft 5 in    | 0.74 m | 2 ft 5 in    | 0.74 m | 2 ft 7 in   | 0.79 m |
| C Length - operating                                       | 4 ft 11.5 in | 1.51 m | 4 ft 11.5 in | 1.51 m | 6 ft 2 in    | 1.88 m | 6 ft 2 in    | 1.88 m | 6 ft 10 in  | 2.08 m |
| D Width - stowed <sup>(1)</sup>                            | 2 ft 7.5 in  | 0.80 m | 2 ft 7.5 in  | 0.80 m | 2 ft 7.5 in  | 0.80 m | 2 ft 7.5 in  | 0.80 m |             |        |
| Width - with stabilizers lowered                           | 6 ft 1 in    | 1.85 m | 6 ft 1 in    | 1.85 m | 6 ft 1 in    | 1.85 m | 6 ft 1 in    | 1.85 m | 6 ft 1 in   | 1.85 m |

## Productivity


|                            |          |        |          |        |        |        |        |        |        |        |
|----------------------------|----------|--------|----------|--------|--------|--------|--------|--------|--------|--------|
| 18 in (46 cm) load center  | 1,000 lb | 454 kg | 1,000 lb | 454 kg | 800 lb | 363 kg | 800 lb | 363 kg | 650 lb | 295 kg |
| 24 in (61 cm) load center  | 1,000 lb | 454 kg | 1,000 lb | 454 kg | 800 lb | 363 kg | 600 lb | 272 kg | 450 lb | 204 kg |
| 42 in (107 cm) load center | 350 lb   | 159 kg | 400 lb   | 181 kg | 500 lb | 227 kg | 350 lb | 159 kg | 250 lb | 113 kg |

## Power

|                                  |                |         |      |         |      |         |      |         |      |         |      |
|----------------------------------|----------------|---------|------|---------|------|---------|------|---------|------|---------|------|
| Average cranks - per length unit | Standard winch | 12.5/ft | 41/m | 12.5/ft | 41/m | 12.5/ft | 41/m | 12.5/ft | 41/m | 12.5/ft | 41/m |
| - carriage moving                |                |         |      |         |      |         |      |         |      |         |      |
| Standard winch - mast moving     |                | 5.5/ft  | 18/m | 5.5/ft  | 18/m | 5.5/ft  | 18/m | 5.5/ft  | 18/m | 5.5/ft  | 18/m |

## Weight and Floor Loading

|                        |        |        |        |        |        |        |        |        |        |        |
|------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Weight - Standard      | 215 lb | 98 kg  | 260 lb | 118 kg | 333 lb | 151 kg | 405 lb | 184 kg | 450 lb | 204 kg |
| Weight - Straddle base | 258 lb | 117 kg | 303 lb | 137 kg | 360 lb | 163 kg | -      | -      | -      | -      |

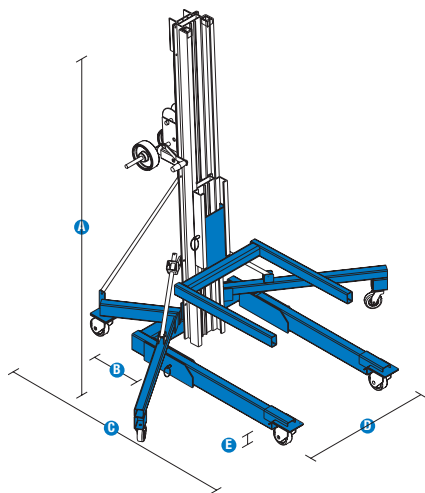

|                                                            | Dimensions           |               | Weight  |        |
|------------------------------------------------------------|----------------------|---------------|---------|--------|
| Load Handling Attachments                                  | US                   | METRIC        | US      | METRIC |
| Standard forks (l/w/d) <sup>(4)</sup>                      | 27/23.5/2.5 in       | 69/60/6 cm    | 38.9 lb | 18 kg  |
| Standard fork size (each)                                  | 2.5/1.5 in           | 6/4 cm        |         |        |
| Adjustable forks assembly (l/w/d) <sup>(3) (4)</sup>       | 27.5/24-30/2.5 in    | 70/61-76/6 cm | 52.5 lb | 24 kg  |
| Adjustable fork size max (each)                            | 2.5/1.5 in           | 6/4 cm        | 52.5 lb | 24 kg  |
| Fork extensions detached (each) (l/w/d) <sup>(3) (4)</sup> | 30/2/3 in            | 76/5/8 cm     | 4.5 lb  | 2 kg   |
| Fork extension attached (each) (l/w/d) <sup>(3) (4)</sup>  | 25/2/3 in            | 64/5/8 cm     | 4.5 lb  | 2 kg   |
| Flat forks (l/w/d) <sup>(4)</sup>                          | 32/16-31/1.5 in      |               | 80.1 lb | 36 kg  |
| Boom (l/w/d) <sup>(3) (4)</sup>                            | 18,24,32,44/1.5/6 in |               | 39.9 lb | 18 kg  |
| Load platform (l/w/d) <sup>(3) (4)</sup>                   | 27.5/23/2.75 in      |               | 31.5 lb | 14 kg  |

(1) Outside dimensions.

(2) For use with standard and adjustable forks only.

(3) Measured from ground to bottom of shackle.

(4) Length/width/depth, from end of carriage and outside of forks

# Genie® Superlift Advantage® SLA™ -5, SLA-10, SLA-15, SLA-20 & SLA-25

## SKU: Standard Model

- **SLA50001A00001:** SLA-5, Standard base
- **SLA50001A00002:** SLA-5, Straddle base
- **SLA10001A00001:** SLA-10, Standard base
- **SLA10001A00002:** SLA-10, Straddle base

\* Build to Order

| Option availability |                                                                   | S | S+ | BtO |
|---------------------|-------------------------------------------------------------------|---|----|-----|
| Chassis             | Rear transport wheel assembly                                     |   |    | ○   |
|                     | Heavy-duty design                                                 | ✓ | ✓  | ✓   |
|                     | Portable compact design for easy transport and storage            | ✓ | ✓  | ✓   |
|                     | Quick setup requires no tools                                     | ✓ | ✓  | ✓   |
|                     | Stabilizer set (standard on SLA-20, SLA-25, not on Straddle base) |   |    | ○   |
| Mast                | Mast brake                                                        |   |    | ○   |
|                     | One-speed manual winch, locks load in place                       | ✓ | ✓  | ✓   |
|                     | Patented telescoping mast system                                  | ✓ | ✓  | ✓   |
|                     | Strong and lightweight aluminum telescoping mast                  | ✓ | ✓  | ✓   |
|                     | Transport carriage lock                                           | ✓ | ✓  | ✓   |
| Wheels & Casters    | Two speed winch (SLA-15, SLA-20, SLA-25 only)                     |   |    | ○   |
|                     | 4in/10cm non-marking front casters                                | ✓ | ✓  | ✓   |
|                     | 5in/12cm rear casters with side brakes                            | ✓ | ✓  | ✓   |
| Attachments         | Adjustable width forks                                            |   | ✓  |     |
|                     | Boom                                                              |   | ✓  |     |
|                     | Load platform                                                     |   | ✓  |     |
|                     | Durable standard steel forks                                      | ✓ | ✓  | ✓   |
|                     | Flat forks (SLA-5, SLA-10, SLA-15)                                |   | ✓  |     |
|                     | Fork extensions (use on Standard or Adjustable forks)             |   | ✓  |     |

## SKU: Standard Model

- **SLA15001A00001:** SLA-15, Standard base
- **SLA15001A00004:** SLA-15, Straddle base
- **SLA20001A00001:** SLA-20, Standard base, Stabilizer set
- **SLA25001A00001:** SLA-25, Standard base, Stabilizer set

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options



Quick Setup



Truck Portable



Max Lift Capacity



## Genie Genuine Accessories<sup>(1)</sup>

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

04/22

